



samlexsolar®
A Division of Samlex America Inc.


90-135W

Portable Charging Kits

Model
MSK-90
90 Watts
MSK-135
135 Watts

Design Features

- Solar panel is pre-wired with battery clamps for a quick and easy connection, 16' cable
- Adjustable legs allow for maximum sun exposure
- Built-in 10 Amp charge controller manages the charge to the battery and prevents overcharging
- For 12V Lead Acid Batteries
- Trifold panel for easy storage and transport
- Includes protective carrying case
- NOTE: Battery is not included

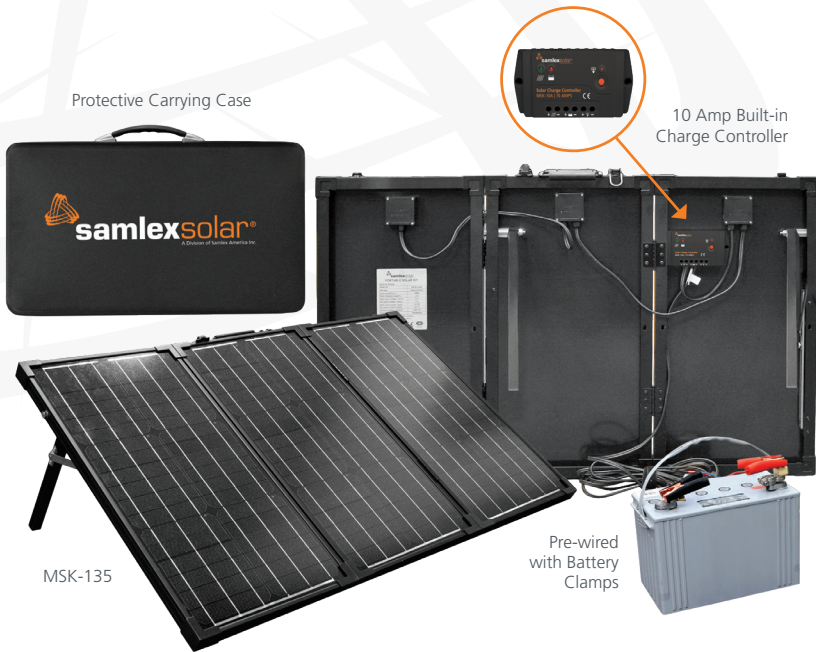

10 YEAR POWER WARRANTY on Solar Panels
2 YEAR LIMITED WARRANTY on Remaining Components

		MODEL NO.	MSK-135	MSK-90
SOLAR ARRAY	NOMINAL MAXIMUM POWER AT STC, P _{max}		135W (3 x 45W Panels ± 3% in parallel)	90W (3 x 30W Panels ± 3% in parallel)
	MAXIMUM POWER VOLTAGE, V _{mp}		17.5V	17.5V
	MAXIMUM POWER CURRENT, I _{mp}		7.71A (2.57A per 45W Panel)	5.13A (1.71A per 30W Panel)
	OPEN CIRCUIT VOLTAGE, V _{oc}		21.6V	21.6V
	SHORT CIRCUIT CURRENT, I _{sc}		8.34A (2.78A per 45W Panel)	5.55A (1.85A per 30W Panel)
	TYPE OF CELLS / SIZE		Monocrystalline	
	NUMBER OF CELLS		36 Cell per Panel	
	MAXIMUM SYSTEM VOLTAGE		1000 VDC	
	OPERATING TEMPERATURE		- 40°C to +85°C / - 40°F to +185°F	
	INGRESS PROTECTION (IP) RATING		Solar Panels: IP-65 ; Charge Controller: IP-30	
STANDARD TEST CONDITIONS (STC) FOR SOLAR MODULE		Irradiance Level: 1000W/m ² / Spectrum: AM1.5 / Cell Temperature: 25°C / 77°F		
OTHER COMPONENTS / PARAMETERS	CABLE SETS FOR BATTERY		Main Cable Set: 14ft cable pre-wired to Charge Controller. Battery end has 2-Pole, 50A Mating Type Battery Connector and 10A fuse. Adapter Set 1: 2-Pole, 50A Mating Type Battery Connector to Battery Clamps, 2ft Adapter Set 2: 2-Pole, 50A Mating Type Battery Connector to 2 pin SAE Connector, 2ft MSK-XLR: 2-pin XLR Adapter / sold separately MSK-EXT: Extension Cable, 10 meters / 33 feet	
	DIMENSIONS	OPEN	1515 x 620 x 30 mm 59.65 x 24.41 x 1.18 in	1035 x 645 x 30 mm 40.75 x 25.39 x 1.18 in
		FOLDED	635 x 516 x 114 mm 25 x 20.3 x 4.5 in	673 x 360 x 114 mm 26.25 x 14.2 x 4.5 in
	WEIGHT		16.18 kg / 35.6 lb	11.45 kg / 25.2 lb

NOTE: Specifications are subject to change without notice.

12026-MSK-90-135-0218