

NEW!



Rule Evacuator 8000

HIGH EFFICIENCY PORTABLE UTILITY PUMP



Rule your dewatering! Backed by the Rule brand of DC pumps, a brand enjoying over 45 years of operational excellence, the Evacuator 8000 represents the largest entrant in the new Evacuator line of high efficiency portable utility pumps.

Providing a sizeable 8000 GPH flow rate, the EV8000 represents the highest flow rate offering in the Evacuator product series. Designed as an alternative to gas or diesel powered portable pumps, the EV8000 excels in work environments requiring fast, efficient removal of large concentrations of standing or flooding water. Similar to the other Evacuator pumps, the EV8000 benefits from the same innovative power connection which allows for direct operation from your vehicle's 12 volt battery, via two heavy duty battery clips.

Applications:


- Bunker water drainage on golf courses
- Sewer system flood water removal
- Boating emergency drainage
- Emergency basement drainage
- General construction site dewatering

The Evacuator 8000 presents many advantages over the current portable offerings

- Superb solids handling capabilities, ensuring little chance of blockage while pump is operational
- Integrated on/off switch in supplied 25 ft cabling, providing operational convenience away from the power source
- Harsh environment DC motor technology, proven in over 15 million operational units
- Direct operation from a 12 volt vehicle battery, providing flexibility in location and use
- Extended dry run time capability, preventing pump damage due to inconsistent water flow
- Thermal overload and internal circuit breaker, ensuring motor protection in the event of a locked rotor
- Thermal overload and circuit breaker protection in the event of a locked rotor



Head-Flow Chart

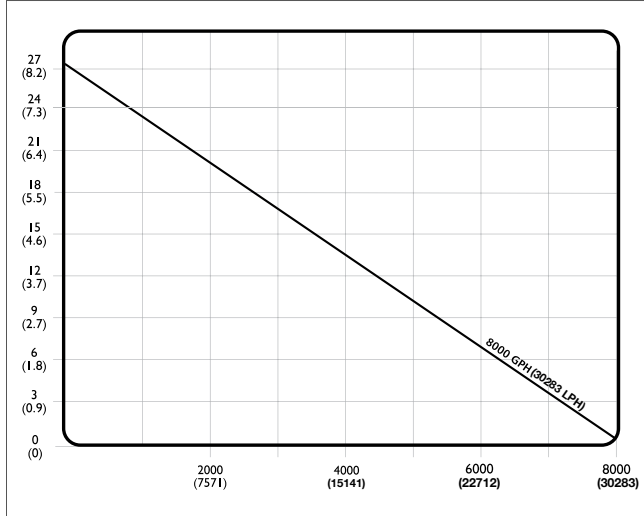

Specifications

Flow 8000 GPH (30283 LPH)	12 Vdc - 14.4 Vdc
Voltage 12Vdc	4000 GPH (13250 LPH) @13.6Vdc
Amp Draw 30 amps	20 Amps
Fuse Size Circuit Breaker Included	Thermal Cut Off and Current Overload Protection
Port Configuration 3in outlet	2" (51mm) Hose Barb
Height 8 1/2in (215mm)	10.5" (267mm)
Width 12in (305mm)	5.5" (140mm)
Product Weight 12lbs (4.9kg)	7" (178mm)

Packaging Specifications

Weight	13 lbs
Dimensions	9" x 13" x 7" (230 x 330 x 180mm)
Master Pack	1



AquaCharge™



RainPerfect™



Evacuator Series

The Rule Innovation suite of products unites the ITT Flow Control Innovation Teams; a collaborative structure of people, technologies, and passion working towards realizing and deploying the next generation in water handling technologies.



Engineered for life

www.ittflowcontrol.com

Warranty: All products of the company are sold and all services of the company are offered subject to the company's warranty and terms and conditions of sale, copies of which will be furnished upon request. The information provided herein is for guidance only, it does not constitute a guarantee of the performance or specification of any individual product or component.